

RECEPTACLES

CABLE-MOUNT RECEPTACLES (PINS) SOLDER BUCKETS ONLY					PANEL-MOUNT RECEPTACLES (PINS)		
# of Contacts	01K Receptacle with Integral Backshell	01T Receptacle with Threaded Backshell	L1K Locking Receptacle w/ Integral Backshell	L1T Locking Receptacle w/ Threaded Backshell	07A Rear Mount Jam Nut Receptacle	71A Front Mount Jam Nut Receptacle	Shell Size
7	SCE2-B-01K06-07P*	SCE2-B-01T06-07P*-003	SCE2-B-L1K06-07P*	SCE2-B-L1T06-07P*-003	SCE2-B-07A06-07P*-XXX	SCE2-B-71A06-07P*-XXX	6
10	SCE2-B-01K07-10AP*	SCE2-B-01T07-10AP*-003	SCE2-B-L1K07-10AP*	SCE2-B-L1T07-10AP*-003	SCE2-B-07A07-10AP*-XXX	SCE2-B-71A07-10AP*-XXX	7
12	SCE2-B-01K07-12P*	SCE2-B-01T07-12P*-003	SCE2-B-L1K07-12P*	SCE2-B-L1T07-12P*-003	SCE2-B-07A07-12P*-XXX	SCE2-B-71A07-12P*-XXX	7
14	SCE2-B-01K07-14P*	SCE2-B-01T07-14P*-003	SCE2-B-L1K07-14P*	SCE2-B-L1T07-14P*-003	SCE2-B-07A07-14P*-XXX	SCE2-B-71A07-14P*-XXX	7
19	SCE2-B-01K08-19P*	SCE2-B-01T08-19P*-003	SCE2-B-L1K08-19P*	SCE2-B-L1T08-19P*-003	SCE2-B-07A08-19P*-XXX	SCE2-B-71A08-19P*-XXX	8
26	SCE2-B-01K09-26P*	SCE2-B-01T09-26P*-003	SCE2-B-L1K09-26P*	SCE2-B-L1T09-26P*-003	SCE2-B-07A09-26P*-XXX	SCE2-B-71A09-26P*-XXX	9
37	SCE2-B-01K10-37P*	SCE2-B-01T10-37P*-003	SCE2-B-L1K10-37P*	SCE2-B-L1T10-37P*-003	SCE2-B-07A10-37P*-XXX	SCE2-B-71A10-37P*-XXX	10

* = Include keyway orientations N,A,B,C,D Add -985 for grounding spring on L1K and L1T types only XXX = Contact Termination Code use -001 for PCB use -002 for Solder Buckets

➔ See page 308 for layouts and keyways.



PLUGS

CABLE-MOUNT PLUGS (SOCKETS)				IN-LINE PLUGS (SOCKETS) SOLDER BUCKETS ONLY		
# of Contacts	76A Rear Mount Jam Nut Plug	67A Front Mount Jam Nut Plug	76T Rear Mount Jam Nut w/ Threaded Backshell Plug	06K In-Line Plug w/ Integral Backshell	06T In-Line Plug w/ Threaded Backshell	Shell Size
7	SCE2-B-76A06-07S*-XXX	SCE2-B-67A06-07S*-XXX	SCE2-B-76T06-07S*-002	SCE2-B-06K06-07S*	SCE2-B-06T06-07S*-003	6
10	SCE2-B-76A07-10AS*-XXX	SCE2-B-67A07-10AS*-XXX	SCE2-B-76T07-10AS*-002	SCE2-B-06K07-10AS*	SCE2-B-06T07-10AS*-003	7
12	SCE2-B-76A07-12S*-XXX	SCE2-B-67A07-12S*-XXX	SCE2-B-76T07-12S*-002	SCE2-B-06K07-12S*	SCE2-B-06T07-12S*-003	7
14	SCE2-B-76A07-14S*-XXX	SCE2-B-67A07-14S*-XXX	SCE2-B-76T07-14S*-002	SCE2-B-06K07-14S*	SCE2-B-06T07-14S*-003	7
19	SCE2-B-76A08-19S*-XXX	SCE2-B-67A08-19S*-XXX	SCE2-B-76T08-19S*-002	SCE2-B-06K08-19S*	SCE2-B-06T08-19S*-003	8
26	SCE2-B-76A09-26S*-XXX	SCE2-B-67A09-26S*-XXX	SCE2-B-76T09-26S*-002	SCE2-B-06K09-26S*	SCE2-B-06T09-26S*-003	9
37	SCE2-B-76A10-37S*-XXX	SCE2-B-67A10-37S*-XXX	SCE2-B-76T10-37S*-002	SCE2-B-06K10-37S*	SCE2-B-06T10-37S*-003	10

XXX = Contact termination code use -001 for PCB use -002 for solder buckets * = Include keyway orientations N,A,B,C,D

➔ See page 308 for layouts and keyways.

NOTE: Use prefix SCE2-ZN for Black Zinc Nickel aluminum version.


RECEPTACLE ACCESSORIES

DUSTCAPS FOR RECEPTACLES SHRINK BOOTS



Shell Size	Metal	Rubber	Metal	Rubber	Metal	Rubber	Straight	Cable Exit Dia. (6.10)	Right Angle	Cable Exit Dia. (6.35)
	with Crimp Ferrule		with Eyelet		with Large Eyelet for Jam Nut					
6	390-5056-06-###-02	390-5063-06-###-02	390-5056-06-###-03	390-5063-06-###-03	390-5056-06-###-05	390-5063-06-###-05	123GB-0798-06-S	0.24 (6.10)	123GB-0798-06-R	0.22 (5.59)
7	390-5056-07-###-02	390-5063-07-###-02	390-5056-07-###-03	390-5063-07-###-03	390-5056-07-###-05	390-5063-07-###-05	123GB-0798-07-S	0.24 (6.10)	123GB-0798-07-R	0.25 (6.35)
8	390-5056-08-###-02	390-5063-08-###-02	390-5056-08-###-03	390-5063-08-###-03	390-5056-08-###-05	390-5063-08-###-05	123GB-0798-08-S	0.24 (6.10)	123GB-0798-08-R	0.25 (6.35)
9	390-5056-09-###-02	390-5063-09-###-02	390-5056-09-###-03	390-5063-09-###-03	390-5056-09-###-05	390-5063-09-###-05	123GB-0798-09-S	0.24 (6.10)	123GB-0798-09-R	0.25 (6.35)
10	390-5056-10-###-02	390-5063-10-###-02	390-5056-10-###-03	390-5063-10-###-03	390-5056-10-###-05	390-5063-10-###-05	123GB-0798-10-S	0.24 (6.10)	123GB-0798-10-R	0.25 (6.35)

= Length of cord 060,130,180 mm (other options available, please contact us)

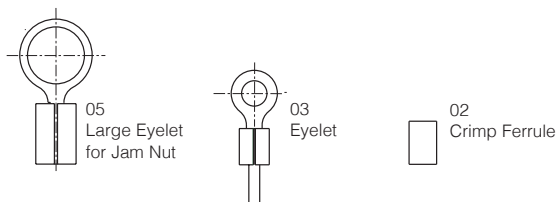

PLUG ACCESSORIES

DUSTCAPS FOR PLUGS SHRINK BOOTS



Shell Size	Metal	Rubber	Metal	Rubber	Metal	Rubber	Straight	Cable Exit Dia. (6.10)	Right Angle	Cable Exit Dia. (6.35)
	with Crimp Ferrule		with Eyelet		with Large Eyelet for Jam Nut					
6	390-5057-06-###-02	390-5064-06-###-02	390-5057-06-###-03	390-5064-06-###-03	390-5057-06-###-05	390-5064-06-###-05	123GB-0798-06-S	0.24 (6.10)	123GB-0798-06-R	0.22 (5.59)
7	390-5057-07-###-02	390-5064-07-###-02	390-5057-07-###-03	390-5064-07-###-03	390-5057-07-###-05	390-5064-07-###-05	123GB-0798-07-S	0.24 (6.10)	123GB-0798-07-R	0.25 (6.35)
8	390-5057-08-###-02	390-5064-08-###-02	390-5057-08-###-03	390-5064-08-###-03	390-5057-08-###-05	390-5064-08-###-05	123GB-0798-08-S	0.24 (6.10)	123GB-0798-08-R	0.25 (6.35)
9	390-5057-09-###-02	390-5064-09-###-02	390-5057-09-###-03	390-5064-09-###-03	390-5057-09-###-05	390-5064-09-###-05	123GB-0798-09-S	0.24 (6.10)	123GB-0798-09-R	0.25 (6.35)
10	390-5057-10-###-02	390-5064-10-###-02	390-5057-10-###-03	390-5064-10-###-03	390-5057-10-###-05	390-5064-10-###-05	123GB-0798-10-S	0.24 (6.10)	123GB-0798-10-R	0.25 (6.35)

= Length of cord 060,130,180 mm (other options available, please contact us.)

All dimensions in inches (millimeters in parenthesis)

INSERT ARRANGEMENTS REAR VIEW OF THE PLUG

● 20AWG contacts ○ 23AWG contacts ⊕ 28AWG contacts

SHELL SIZE	06		07		
LAYOUT	06-07	06-09	07-10A	07-12	07-14
SHELL SIZE	07	08	09	10	
LAYOUT	07-19	08-19	09-26	10-37	

PLUG AND RECEPTACLE KEYWAY ORIENTATION

KEYWAY ORIENTATION LETTER	PLUG KEYWAY ORIENTATION	RECEPTACLE KEYWAY ORIENTATION	KEYWAY ORIENTATION LETTER	PLUG KEYWAY ORIENTATION	RECEPTACLE KEYWAY ORIENTATION
N			C		
A			D		
B					

TERMINOLOGY

